

Our Goal Is To Do The Best Of The Best

C-Oil STAND UP 20W-50

High Quality Engine Oil

It is high-performance engine oil that especially improved by modern additives and forms film layer on the surface of motor. Provides high-performance in gasoline and diesel engines of passenger cars, and LPG systems.

C-Oil 0W-30

Unique Performance Full Synthetic Engine Oil

Extra ordinary performance engine oil for ultimate version of gasoline and diesel engine vehicles, produced by full synthetic base oils. Provides extra lubricating and high protection in new generation gasoline and diesel engines

C-Oil 5W-30

Unique Performance Full Synthetic Engine Oil

In accordance with modern engines long term oil changes, improved synthetic technology by special additives. Suitable for running four seasons, all temperatures, high revolutions per minute gasoline and diesel engines

C-Oil 0W-40

Unique Performance Full Synthetic Engine Oil

Fully synthetic, extra avoiding corrosion and improved high cleaning power formulation in four seasons and all road conditions. Provides high performance in gasoline, diesel, turbocharged, natural aspirated and multi valve all gasoline engines also LPG system running vehicles

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 445	ASTM D 2270	ASTM D 97
0,88	167	19	120	226

Performance Specifications SAE 20W-50 API

Viscosity Index	Flash Point, °C
ASTM D 2270	ASTM D 92
161	236

Performance Specifications SAE 0W-30

Viscosity Index	Flash Point, °C
ASTM D 2270	ASTM D 92
155	207

Performance Specifications SAE 5W-30 API

Viscosity Index	Flash Point, °C
ASTM D 2270	ASTM D 92
177	236

Performance Specifications SAE 0W-40 API



Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 445	ASTM D 2270	ASTM D 92
0,863	56,5	9,6	155	207

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 445	ASTM D 2270	ASTM D 92
0,846	79,2	13,6	177	236

C-Oil DPF FULL 5W-30

Premium Long Life Full Synthetic Engine Oil

An advanced performance synthetic engine oil, especially in the new generation of diesel engine particulate filter is manufactured for excellent lubrication and corrosion prevention. Additional additives and synthetic technology with diesel and gasoline engines can be used safely in all for seasons

C-Oil SAE 5W-30

Unique Performance Synthetic Engine Oil

In accordance with modern engines long term oil changes, improved synthetic technology by special additives. Suitable for running four seasons all temperatures, high revolutions per minute gasoline and diesel engines .

C-Oil SAE 5W-40

Extra Performance Full Synthetic Engine Oil

Synthetic engine oil, formulated by hi-tech synthetic base oils and extra qualified additives. Provides extra performance in gasoline, diesel, LPG running natural absorbed, injection, turbocharged, sedan and light commercial vehicles

C-Oil 5W-40

Full Synthetic Engine Oil

Full synthetic engine oil, ensures high performance and efficient protection by its ultimate synthetic technological formulation. Used for every new generation gasoline and light commercial vehicles including all engines of gasoline and diesel

C-Oil 10W-40

High Performance Semi-Synthetic Gasoline Engine Oil

Improved specially by ultimate synthetic technology gasoline engine oil effective lubricating in all climates and road conditions with its unique protection. Used in new-generation or ancient all gasoline engines besides, turbocharged or natural absorbed, non heavy duty diesel engines.

C-Oil Gasoline 15W-40

High Quality Gasoline Engine Oil

High performance engine oil fortified with high quality mineral base oils and advanced technology additives for strong protection and effective lubrication. Provides high-performance in gasoline and diesel engines of passenger cars, and LPG systems.

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 2270	ASTM D 92	ASTM D 97

0,85

11,6

161

230

-39

Performance Specifications SAE 5W-30 API

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 445	ASTM D 2270	ASTM D 92

0,863

55,7

9,56

155

206

Performance Specifications SAE 5W-30 API

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 445	ASTM D 2270	ASTM D 92

0,857

86,2

14,3

172

230

Performance Specifications SAE 5W-30 API

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 445	ASTM D 2270	ASTM D 92

0,859

94

14,5

161

226

Performance Specifications SAE 5W-40 API SL/CF

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 445	ASTM D 2270	ASTM D 92

0,882

96,5

14,7

157

216

Performance Specifications API SL/CF SAE 10W-40

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 445	ASTM D 2270	ASTM D 97

0,882

110,7

15,5

140

228

Performance Specifications SAE 15W-40 API

C-Oil 4T 10W-40**Four-Stroke Semi-Synthetic Motocycle Oil**

Four- stroke semi-synthetic motocycle oil that provides excellent protection in terms of the all working conditions with superior performance. Suitable for all four stroke air or water cooled motocycles in wide -range conditions. Meets with. European And Japanese motocycle manufacturers of API SG JASO MA Standarts and specifications

Performance Specifications SAE 10W-40 API**C-Oil SUPER SYNTHETIX 2T****Superior Performance Full Synthetic Two-Stroke Engine Oil**

Fully synthetic engine oil designed for two stroke motocycles where required high power and outstanding performance in extreme conditions. Suitable for use in all type of air and water-cooled, high power two-stroke motocycle engines.

Performance Specifications API TC**C-Oil 4T 15W-40****Extra Performance Four-Stroke Motocycle Engine Oil**

4T 15w-40 is semi-synthetic based four stroke motocycle engine oil specially formulated to provide strong protection and outstanding performance at the hardest conditions. Recommended for all type of air and watercooled engines of four-stroke motocycles and scooters where an API SG and JASO MA level performance is recommended.

Performance Specifications SAE 15W-40 API**C-Oil SUPER 2T****High Performance Two-Stroke Engine Oil**

Formulated for two cycled engines selected high quality mineral base oils with addition of proper agents. Recommendations and instructions of manufacturers should be followed for proper fuel and oil mixture ratio. Suitable for use all two stroke motocycles, hand saws, small generators, pumps cooled by air and operates with lead or unleaded gasoline.

Superior performance synthetic engine oil, especially in the new

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 445	ASTM D 2270	ASTM D 92

0,87

98

14,6

157

ASTM D 92
230

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Iash Point, °C	Pour Point, °C
ASTM D 4052	ASTM D 445	ASTM D 2270	ASTM D 92	ASTM D 97

0,882

8,6

152

104

ASTM D 97
-33

Typical Physical And Chemical Characteristics

K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 445	ASTM D 445	ASTM D 2270	ASTM D 92

160,5

14,3

137

228

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 2270	ASTM D 92

0,89

8,7

98

258



C-Oil DPF FULL5W-40

Premium Longlife Full Synthetic DPF Engine Oil

generation of diesel engine particulate filter is manufactured for excellent lubrication and corrosion prevention. Additional additives and synthetic technology with diesel and gasoline engines can be used safely in all for seasons

C-Oil 10W-30

High Performance Diesel Engine Oil

High performance diesel engine oil, formed by synthetic technology with long term oil changes property. Used confidently in modern turboharget light commercial vehicle up to in hard roads and offroad running vehicles

C-Oil DIESEL SEA 10W-40

Class Quality Extra Long Life Semi Synthetic Heavy Duty Diesel Engine Oil

Extra high performance semi-synthetic diesel engine oil formulated by using synthetic technology. Provides perfect protection thanks to long term oil intervals in new generation and old trucks, buses, heavy duty type diesel engine of other sectors and high performance required industrial applications

C-Oil SAE 10W-40

Outstanding Power and Performance Full Synthetic Heavy Duty Diesel Engine Oil

Superior performance fully synthetic diesel engine oil formulated using ultimate synthetic technology. With its extented service life provides excellent protection for heavy duty naturally aspirated or turbocharged diesel engines of modern or old trucks, buses, constructions and the others in industrial applications working under all hard and climate conditions.

C-Oil SÜPERX 20W-50

High Performance Heavy Duty Diesel Engine Oil

Multi-grade, heavy duty diesel engine oil with high qualities, superior performance that can be used in all seasons. Also suitable for gasoline engines. Used in all buses, trucks, international road transport, tractors, heavy duty transportation vehicles, generators and work machines including turbo and super charged ones, operating under all road and climate conditions.

C-Oil SAE 15W-40

Outstanding Performance And Extended Life Heavy Duty Diesel Engine Oil

Heavy duty diesel engine oil designed for new generation modern technology diesel engine that improves excellent lubricating function,perfect performance long life in hard road and climate conditions.Provides extra performance all kinds of diesel or gasoline truck, trailer, bus work machine generators modern vehicles and on combined philo equipment's turbocharged supercharged new generation engines. By it's special formulation and long term oil changes

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C	Pour Point, °C
ASTM D 4052 0,86	ASTM D 445 14,2	ASTM D 2270 163	ASTM D 92 228	ASTM D 97 -39

Performance Specifications SAE 5W-40 API

Viscosity Index	Flash Point, °C
ASTM D 2270 147	ASTM D 92 226

Performance Specifications SAE 10W-30 API

Viscosity Index	Flash Point, °C
ASTM D 2270 151	ASTM D 92 222

Performance Specifications SAE 10W-40

Viscosity Index	Flash Point, °C
ASTM D 2270 161	ASTM D 92 226

Performance Specifications SAE 10W-40

Viscosity Index	Flash Point, °C
ASTM D 2270 125	ASTM D 92 236

Performance Specifications 20W-50 API

Viscosity Index	Flash Point, °C
ASTM D 2270 138	ASTM D 92 236

Performance Specifications SAE 15W-40 API

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052 0,88	ASTM D 445 107,1	ASTM D 445 14,4	ASTM D 2270 138	ASTM D 92 236

Performance Specifications SAE 15W-40 API

C-Oil GEAR OIL 75W-90**High Quality Synthetic Gear Oil**

Fully synthetic heavy duty type gearoil, has long term oil change with high performance. Used safety especially modern sedans commercial and off road vehicle's caterpillar's hard condition running gear boxer with or without synchromesh and in differentials transmissions axles.

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 445	ASTM D 2270	ASTM D 92
0,866	108,6	15,2	147	198

Performance Specifications SAE 75W-90 API**C-Oil GEAR OIL EP MB 80W****High Quality Automotive Gear Oil**

Providing maximum protection automotive gear oil representing high performance in the hardest running conditions of over loading and over pressure. Suitable for car, truck, light truck, commercial and agricultural vehicles and work machines' gear boxes and differentials, axle and last impellent gears. Especially supplies Mercedes-Benz and MAN's performance requirements gear oil.

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 445	ASTM D 2270	ASTM D 92
0,89	85,6	10	95	210

Performance Specifications SAE 80W**C-Oil GEAR OIL LS 90****High Quality Limited Slip Differential Oil**

Improved product for using of limited-locked sliding differential systems vehicles and its equipments. Used for increasing performance of last impellent gear sedans commercial vehicles, buses, agricultural machines, work machines's axle and locked sliding differential.

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 445	ASTM D 2270	ASTM D 92
0,902	178,6	16,3	95	218

Performance Specifications SAE 90**C-Oil GEAR OIL EP 140****Maximum Protection in Hard Conditions Transmission And Differential Oils**

Mineral based automotive gearbox lubricants formulated by high technology additive package and extreme pressure agent. Suitable for use in hypoid differentials operating under heavy duty also in gear boxes synchronized gear wheels, chassis lubricating systems, trucks, agriculture and work machines

Typical Physical And Chemical Characteristics

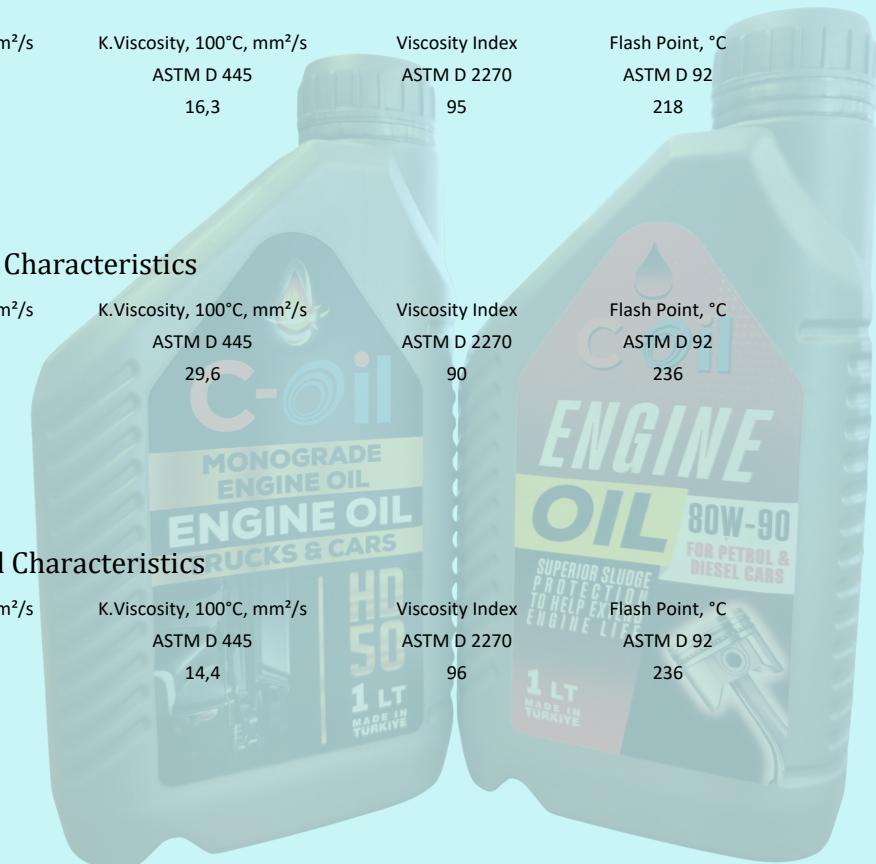
Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 445	ASTM D 2270	ASTM D 92
0,91	458,6	29,6	90	236

Performance Specifications SAE 140**C-Oil GEAR OIL EP 80W-90****Maximum Protection in Hard Conditions Transmission And Differential Oils**

Mineral based automotive gearbox lubricants formulated by high technology additive package and extreme pressure agent. Suitable for use in hypoid differentials operating under heavy duty also in gear boxes synchronized gear wheels, chassis lubricating systems, trucks, agriculture and work machines

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052	ASTM D 445	ASTM D 445	ASTM D 2270	ASTM D 92
0,893	148,3	14,4	96	236

Performance Specifications SAE 80W-90

C-Oil GEAR OIL 80W-140

Advanced Performance Gear Oil

Multipurpose gear oil, improved by over pressure (EP) and wear avoided modern additives. Suitable for multi purpose usage of all cold and hard conditions running that has oil bath brake systems axle, gear systems and brake discs

C-Oil GEAR OIL 75W-80

High Quality Synthetic Gear Oil

Fully synthetic heavy duty type gear oil, has long term oil change with high performance. Used safety especially modern sedans commercial and off road vehicle's caterpillar's hard condition running gear boxer with or without synchromesh and in differentials transmissions axles

C-Oil GEAR OIL HD 85W-140

Heavy Duty Transmission And Differential Gear Oils

These are heavy duty gear lubricants resistant against extreme pressure and prepared by special formulation of high performance additives mixing with high quality mineral base oils. They are used in differential systems consisting of conical, hypoid and spiral gears of automobiles, trucks, buses, heavy duty vehicles, light service commercial vehicles, agriculture vehicles and work machines

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052 0,896	ASTM D 445 210,8	ASTM D 445 25,8	ASTM D 2270 151	ASTM D 92 198

Performance Specifications SAE 80W-140

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index
ASTM D 4052 0,878	ASTM D 445 58,6	ASTM D 445 9,7	ASTM D 2270 154

Performance Specifications SAE 75W-80

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052 0,907	ASTM D 445 357,8	ASTM D 445 28,8	ASTM D 2270 95	ASTM D 92 236

Performance Specifications SAE 85W-140

C-Oil ATF III

Superior Performance Automatic Transmission Fluid

High quality, automatic gearbox oil that supply General Motors Dexron III and Ford Mercon specifications. Usable all in GM automatic gearbox and required Dexron III oil new automatic transmission systems.

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052 0,872	ASTM D 445 36,6	ASTM D 445 7,5	ASTM D 2270 174	ASTM D 92 202

Performance Specifications GM Dexron III

C-Oil ATF II

Superior Performance Automatic Transmission Fluid

It is a multi-purpose automatic transmission fluid having high viscosity index formulated by special package of additives mixed with well refined base oils. It is used for the automatic transmissions and power steering systems and some manual transmissions of passenger vehicles, light commercial vehicles, buses, trucks and work machines and industrial vehicles working under heavy duty conditions, and in recommended position in special hydraulic systems.

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052 0,872	ASTM D 445 35,6	ASTM D 445 7,32	ASTM D 2270 169	ASTM D 92 204

Performance Specifications GM DEXRON II

C-Oil Trkt 422

High Performance Transmission and Hydraulic Oil For Tractors

This is multifunctional power transmission oil providing outstanding performance for the necessities of hydraulic lubricant and especially in transmission systems of tractors. It is used in brake and clutch systems, except for engine, transmission and hydraulic systems, differentials of tractors, agriculture and work machines used in automotive, agriculture and industry sectors

Typical Physical And Chemical Characteristics

Density, 15°C, kg/L	K.Viscosity, 40°C, mm ² /s	K.Viscosity, 100°C, mm ² /s	Viscosity Index	Flash Point, °C
ASTM D 4052 0,891	ASTM D 445 92,21	ASTM D 445 11,3	ASTM D 2270 110	ASTM D 92 228

Performance Specifications SAE 10W-30 API

C-Oil Trkt 20W-50*High Protection and Performance Economic Tractor Engine Oil*

Extra quality engineoil improved especially usefor agricultural machines diesel engine. Used new and old tractor also, high performance recommended product in all agricultural diesel engines to combineharvester, disinfection machine.

C-Oil Trkt 15W-40*High Protection and Performance Economic Tractor Engine Oil*

Extra quality engineoil improved especially foruse agricultural machines diesel engine. Used new and old tractor also, high performance recommended product in all agricultural diesel engines to combineharvester, disinfection machine.

C-Oil ANTIFREEZE COOLANT FLUID*Superior Performance and Extended Life Antifreeze Coolant Fluid*

C-Oil antifreeze is high performance, no silicate containing, mono ethylene glycol based engine coolant that is prepared by using Organic Acid Technology (OAT). Formulated for the cooling systems of all diesel and gasoline vehicles and for long-distance vehicles. Also, it is multipurpose coolant fluid for not only heavy- duty vehicles but also usable in all radiator types of gasoline vehicles.

C-Oil HYDRAULIC BRAKE OIL-DOT 3 & DOT 4

It is anin quality brakehydraulic exhibiting excellent performance in hydraulic brake systems and clutches of motorized vehicles. Ensures excellent power transmission and safe operation thanks to its high boiling point and maximum protection as result of special additive contents.

C-Oil Hdrlk HYDRAULIC SYSTEM OILS*High Performance Hydraulic System Oils*

These are high-performance hydraulic system oils produced by the mixture of well-refined base oil and well-qualified additives. They are used in fixed and transportable hydraulic systems, machine tool, hydraulic presses, geared and piston pumps, in screwed type compressor in accordance with manufacturer's instructions and recommendations, industrial work machines, mobile construction elements and gear boxes.

Typical Physical And Chemical Characteristics

Density, 15°C,kg/L ASTM D 4052	K.Viscosity, 40°C,mm ² /s ASTM D 445	K.Viscosity, 100°C, mm ² /s ASTM D 445	Viscosity Index ASTM D 2270	Flash Point, °C ASTM D 92
0,892	164,7	18	121	242

Typical Physical And Chemical Characteristics

Density, 15°C,kg/L ASTM D 4052	K.Viscosity, 40°C,mm ² /s ASTM D 445	K.Viscosity, 100°C, mm ² /s ASTM D 445	Viscosity Index ASTM D 2270	Flash Point, °C ASTM D 92
0,884	121	15,2	130	230

Typical Physical And Chemical Characteristics

Boiling Point, °C ASTM D 1120	Freezing Point, °C ASTM D 1177	Density, 20°C, kg/L ASTM D 1122	ASTM D 1287	100%
182	-	1,12	-	% 50 (Water Blend)
-	-37 (-18:33)	-	8,61	

Typical Physical And Chemical Characteristics

pH VALUE SAE	K.Viscosity,100°C, mm ² /s ASTM D 445	Boiling Point, °C	DOT-3
			DOT-4
7-11,5	1,5	205	
7-11,5	1,5	232	

Typical Physical And Chemical Characteristics

Density, 15°C,kg/L ASTM D 4052	K.Viscosity, 40°C,mm ² /s ASTM D 445	K.Viscosity, 100°C, mm ² /s ASTM D 445	Viscosity Index ASTM D 2270	Flash Point, °C ASTM D 92
0,867	22	4,3	94	190
0,876	32	5,4	101	216
0,878	46	6,7	104	224
0,887	68	8,6	95	236
0,89	100	11,3	97	238
0,892	150	14,9	95	254

C-Oil BEARING COMPLEX GREASE

High Performance Bearing Complex Grease

Mineral based lithium complex greasewith highperformance and long service life under high temperature conditions. Provides extra performance for many industrial applications such as industry, automotive, mining, construction, iron-steel industries, marine, also hard working conditions in high temperature, heavy and shock loading. The EPX-2 Grease is suitable for vibrating operation applications thanks to molybdenum disulphide contens



Typical Physical And Chemical Characteristics

NLGI No	Soap Type	Penetration, Worked, 25°C, 0.1 mm	Dropping Point, °C
-	-	-	ASTM D 566
1	Lithium & Calcium Complex	310-340	260
2	Lithium & Calcium Complex	265-295	260

C-Oil LITHIUM CALCIUM COMPLEX GREASE

Extra Quality Multipurpose Water Resistant Grease

Multi purpose water resistant Grease, provides effective lubricating to wide temperature span working and over loading conditions. Usable for flat and ball bearings, agricultural transportation equipments, light commercial vehicles, sliding, ball or turning bearings under load and also chassis, central lubricating.

Typical Physical And Chemical Characteristics

NLGI No	Soap Type	Penetration, Worked, 25°C, 0.1 mm	Dropping Point, °C
-	-	-	ASTM D 566
1	Lithium & Calcium Complex	310-340	260
2	Lithium & Calcium Complex	265-295	260

C-Oil LITHIUM CALCIUM EP GREASE

Extra Performance Extreme Pressure Lithium & Calcium Grease

Multi purpose Grease, provides extra performance in over pressure and sudden load implied applications Usable in general lubricating of sliding ball and turning bearing, wheel bearing , under load , chassis lubricating, for transportation vehicles and agricultural equipment general lubrication. For sudden loads and vibration by temperature variation, application c-oil Molybdenum Lithium Calcium Grease must be preferred.

Typical Physical And Chemical Characteristics

Colour	NLGI No	Penetration, Worked, 25°C, 0.1 mm	Soap Type	Dropping Point, °C
-	-	ASTM D 217	-	ASTM D 566
Light Brown	0	355-385	Lithium & Calcium	185
Light Brown	1	310-340	Lithium & Calcium	185
Light Brown	2	265-295	Lithium & Calcium	185
Light Brow	3	220-250	Lithium & Calcium	185

C-Oil BEARING GREASE

Extra Performance Lithium Based Bearing Grease

Grease with lithium soap prepared from by quality base oils and additives used in various industries. Used in automobiles, commercial and off-road vehicles, agricultural and working machines of wheel bearings, central lubrication systems, ball and sliding bearings of automobiles, at not working under heavy load and high temperature also used safely in electrical engine rollers.

Typical Physical And Chemical Characteristics

Colour	NLGI No	Worked,25°C, 0.1 mm	Soap Type	Dropping Point, °C
-	-	ASTM D 217	-	ASTM D 566
Light Brown	0	400-430	Lithium	196
Light Brown	1	355-385	Lithium	196
Light Brown	2	310-340	Lithium	196
Light Brown	3	265-295	Lithium	196



www.c-oil.com.tr

www.celikc.com

Telephone

+90 531 8362647

+90 216 3623540

Mail

www.c-oil.com.tr

info@c-oil.com.tr

C-oil



Mineral oil Made in Turkey